


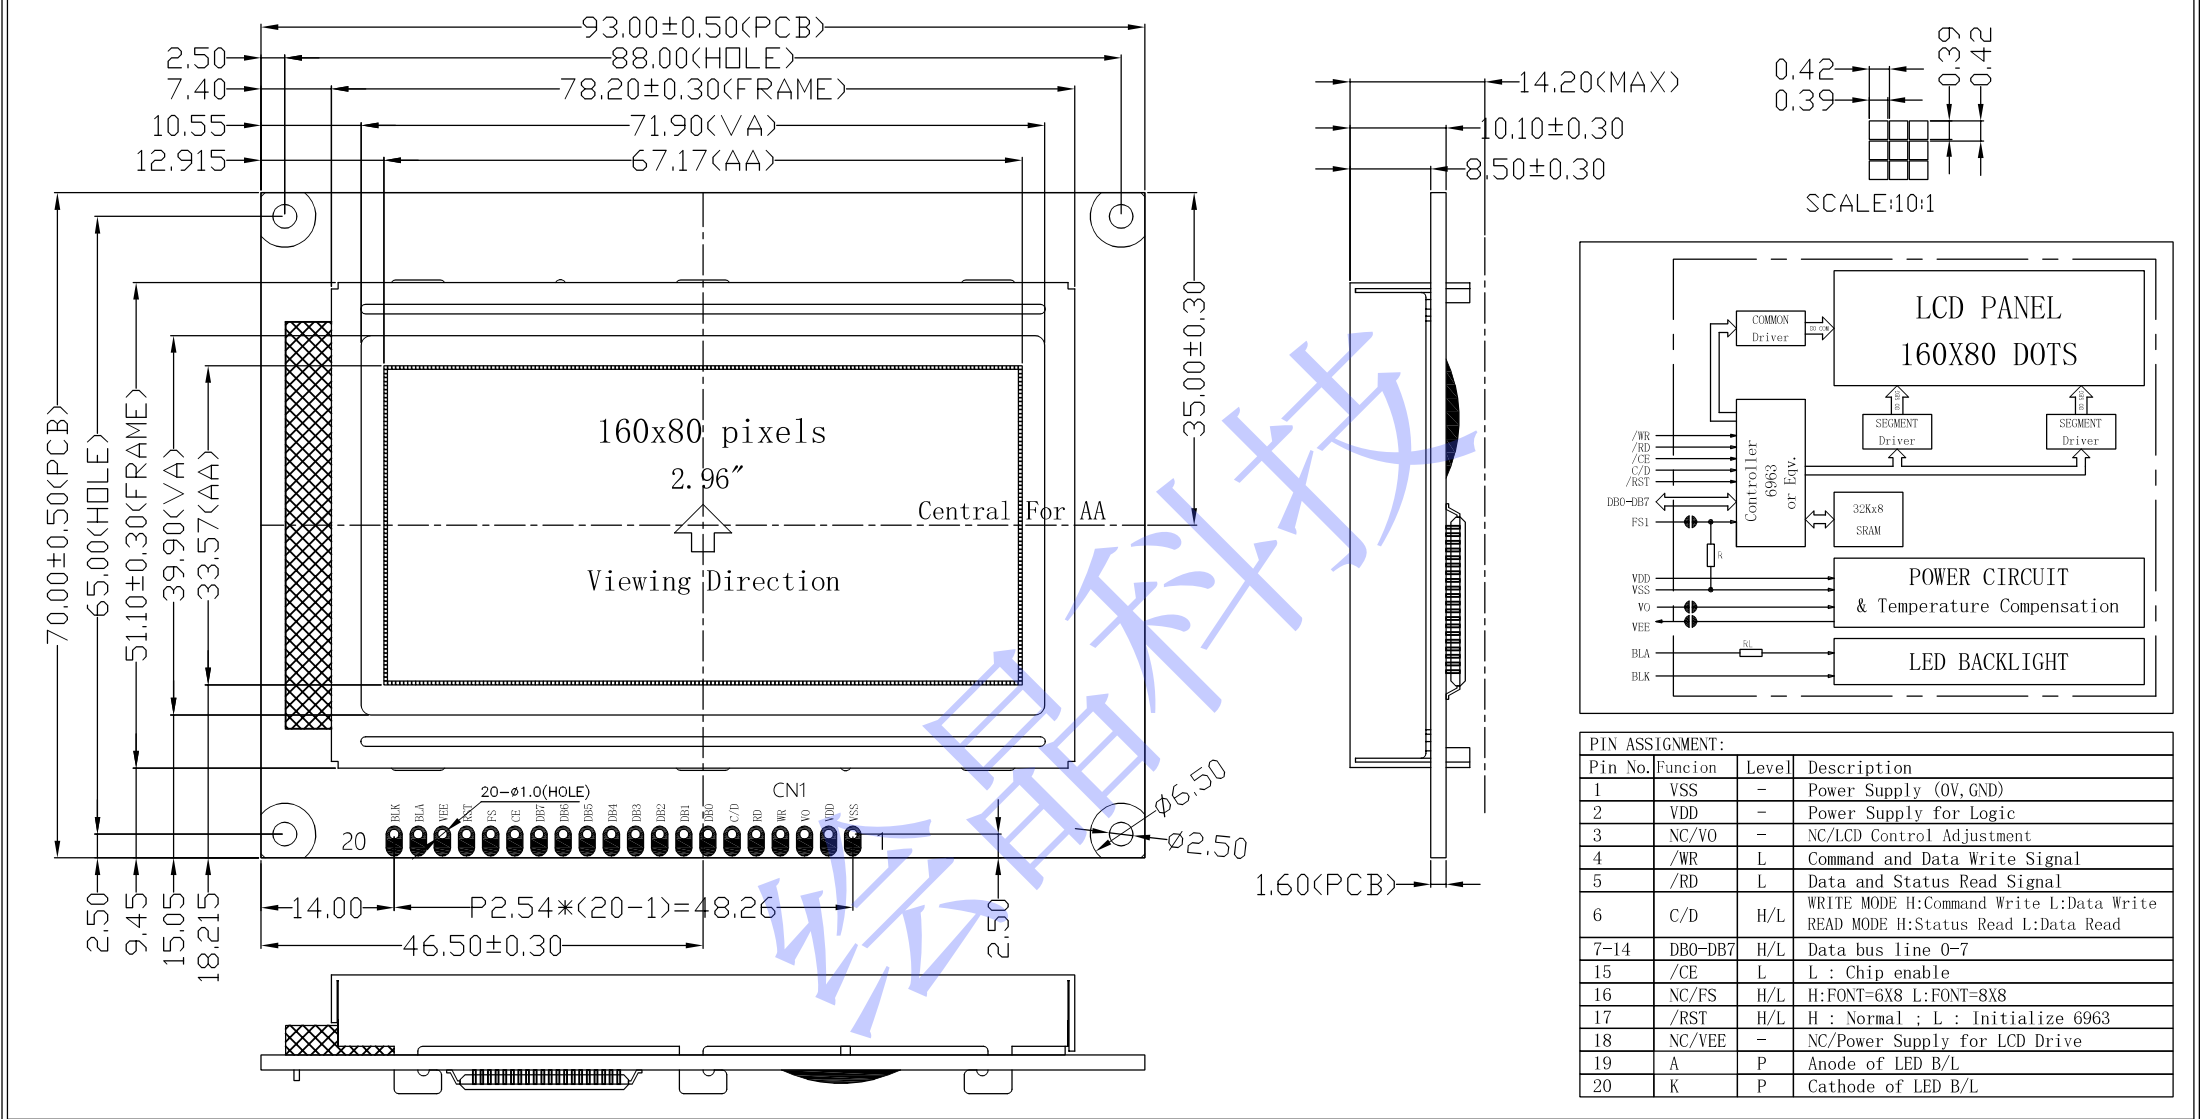

项目/ITEM	参数/PARAMETERS	项目/ITEM	参数/PARAMETERS	绘晶科技有限公司 huijing Technology Co. Ltd.			
OPERATING VOLTAGE	5.0V	OPERATING TEMP	-20°C ~ 70°C	DRAWN/设计	LM	NAME/名称	DISPLAY MODULE
OPERATING CURRENT	20MA(max,WITHOUT BACKLIGHT)	STORAGE TEMP	-30°C ~ 80°C			MODEL NO./型号	16080TXA
LCD DRIVE VOLTAGE	13.5± 0.30V(VDD-V0/TBD)	BACKLIGHT	3 LEDS,45MA(TYP.),VLED=5.0V,Y-G	CHECKED/检查	ZPF	REV./版本	√1.0
DISPLAY MODE	STN Y-G Positive Transflective	ROHS STANDARD	YES ☒ NO ☐	APPROVED/批准	YXS	DATE/日期	2024-08-29
LCD DRIVE METHOD	DUTY: 1/80; BIAS: 1/9	CONNECTION	HOLE	TEL/电话	0745-6688666	URL/网址	http://www.huijinglcm.com
Controller/Driver	UCi6963 OR EQV.	UNSPECIFIED	± 0.2mm				
VIEW DIRECTION	6:00 O'CLOCK	Third perspective					