
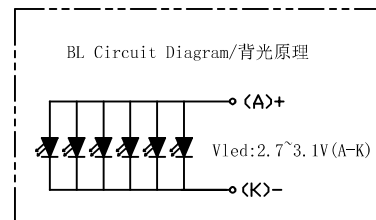


客户确认签名/ APPR. BY Customer	
------------------------------	--



PIN ASSIGNMENT:		Example(4 Line Serial)	
1	IT0		
2	VM	✗	
3	VG		
4	VO		
5	XV0		
6	CAIP		
7	CAIN		
8	VDD		+3.3V
9	VSS		
10	CS		MCU 10
11	A0		MCU 10
12	WR/ERD		H(默认拉高)
13	RST		MCU 10
14	SCL(D0)		MCU 10
15	SDA(D1-D3)		MCU 10
16	D4-D7		H(默认拉高)

仅为举例应用

项目/ITEM	参数/PARAMETERS	项目/ITEM	参数/PARAMETERS	 HUIJING	深圳市绘晶科技有限公司 Shenzhen huijing Technology Co. Ltd.		
OPERATING VOLTAGE	2.7~3.3V(typical)	OPERATING TEMP	-20℃ ~ 70℃				
OPERATING CURRENT	0.5MA(max,WITHOUT BACKLIGHT)	STORAGE TEMP	-30℃ ~ 80℃				
LCD DRIVE VOLTAGE	10.0V(VO-XVO TBD以样品为准)	BACKLIGHT	6 LEDS,ILED≤90MA,Vled:2.7~3.1V(A-K)				
DISPLAY MODE	FSTN/POSITIVE/TRANSFLECTIVE	ROHS STANDARD	YES ☒ NO ☐				
LCD DRIVE METHOD	DUTY: 1/65; BIAS: 1/9	CONNECTION	FPC	DRAWN/设计	LM	NAME/名称	COG 工程图
Driver/Controller	ST75256G	UNSPECIFIED	± 0.2mm	CHECKED/检查	ZPF	MODEL NO./型号	COG-91
VIEW DIRECTION	6:00 O'CLOCK	Third perspective		APPROVED/批准	YXS	REV./版本	V1.0
				TEL/电话	0755-23146001	DATE/日期	2022-10-31
				FAX/传真	0755-23146002	URL/网址	http://www.huijinglcm.com
				Address/地址	深圳市宝安区石岩街道官田横坑工业大道华丰官田科技园A3栋4楼/4th Floor, Building A3, Hufeng Guantian Science and Technology Park, Guantian Hongkeng Industrial Avenue, Shiyao Street, Bao'an District, Shenzhen		